
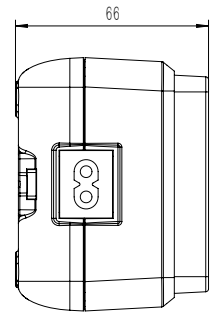
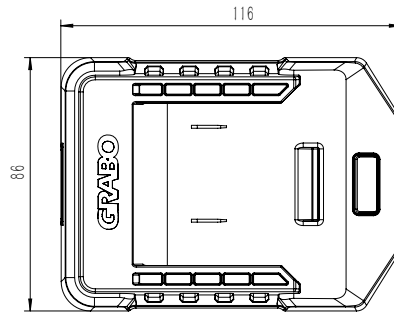
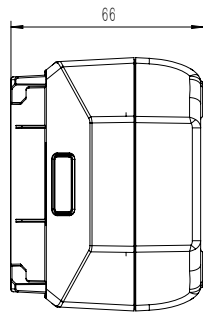
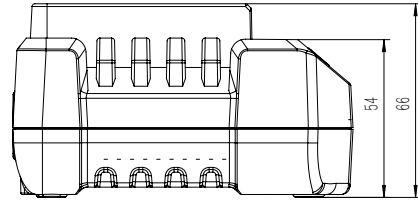


GRABO® High-Flow Battery Charger HEAVY LIFTING MADE EASY

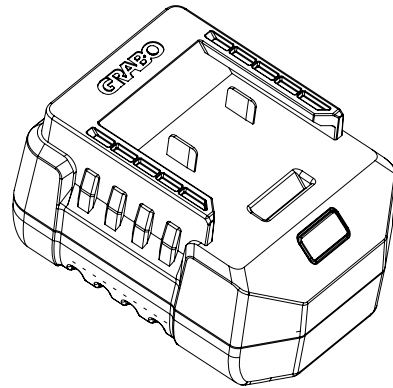

Specifications:

Model / SKU	RK20001
Charging output voltage	21 V
Charging output current	200 – 400 mA under load, 1.4 A max
Charging input	100 – 240 V AC; 50/60 Hz; 1.5 A max
Rated power	23.52 W
Operating temperature	0°C – 40°C / 32°F – 105°F
Storage temperature	-20°C – 85°C / -4°F – 185°F
Working conditions	Indoor use only; not waterproof (IP0)

GRABO headquarters:

Eastern Commerce Center
6000 S Eastern Ave
Unit 9E
Las Vegas, Nevada, 89119

Info@GRABO.com

www.GRABO.com

Main Office:

+1 (844) 430-0510

Help & Warranty:

+1 (702) 718-2433

By Nemo Power Tools
www.GRABO.com

