
# OE WAD

# **GRABO<sup>®</sup> High-Flow Base Add-On 400 HEAVY LIFTING MADE EASY**

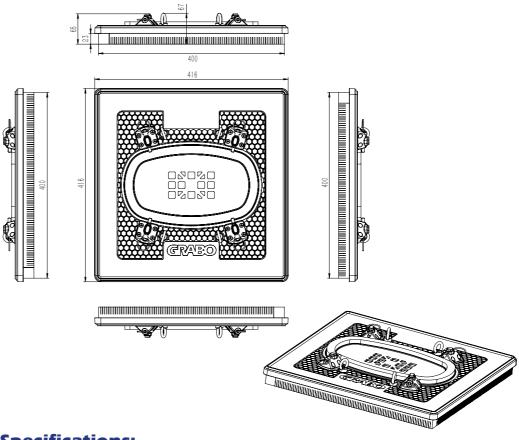

### **Specifications:**

**Suction Plates** 

Suction Plate 400 with SMART CUT foam seal

416 x 416 x 17.3 mm

### **GRABO® High-Flow Base Add-On lifting capacity**

**NOTICE** The GRABO® High-Flow Suction Plate 400 was tested up to 164 kg (360 lbs) at maximum lifting force under ideal conditions. However, this figure is the breaking point under optimal lab testing conditions and must never be reached in real-world applications!

Local regulations require different safety margins to be used, and the official tool Working Load Limit (WLL) is set on a 1:2 ratio and can be seen in the lifting force chart above.

### Lifting force chart

PRESSURE VALUE		SUCTION PLATE 400	
PSI	BAR	Lbs	Kg
3.0	0.2	180	82
2.5	0.17	165	75
2.0	0.137	150	68
1.5	0.1	132	60
1.0	0.06	71.6	32.5

Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product manual on GRABO com or contact a Sales Representative for more information.

## By Nemo Power Tools www.GRABO.com

### **GRABO** headquarters:

Eastern Commerce Center 6000 S Eastern Ave Unit 9E Las Vegas, Nevada, 89119

Info@GRABO.com

www.GRABO.com

**Main Office:** +1 (844) 430-0510

**Help & Warranty:** +1 (702) 718-2433