


## BRACE SEAL HEAVY LIFTING MADE EASY

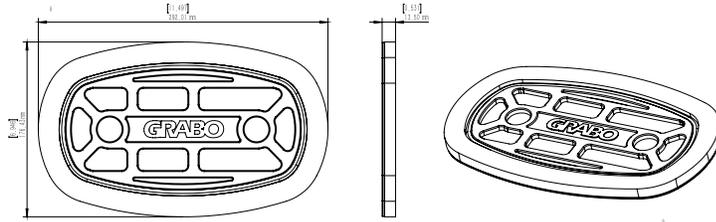

### Specifications:

Black foam seal	
Material	SBR rubber foam sponge
Color	Black
L x W x H	11.5 x 6.9 x 0.53" ( 292.5 x 175.5 x 13.5 mm)
Working temperature	32°F~140°F( 0°C~60 °C )
Density	10.6 Lb/cft (170 kg/m <sup>3</sup> )
Hardness, Shore C	~10 +/-2
Tearing Pressure	1800 Psi (126 kg/cm <sup>2</sup> )
Compression to 25% size at	8.5 Psi (6000 kg/m <sup>2</sup> )
Lifetime (Compressions till performance reduction).	~900
Water Absorption, %	<=5
Shrinkage at 160F (70C) for 24 hrs, %	<=20
Recommended Storage Temperature	Room temperature
Applicable Surface Type	Smooth thin material ( ≤4mm)
Red brace	
Material	Silicon
Color	Red
Density	40.5 Lb/cft (650 kg/m <sup>3</sup> )
Hardness, Shore C	55 +/-5
Water Absorption, %	<=4
Recommended Storage Temperature	Room temperature

### Lifting Capacity:

Material	Glass	Metal	Wood	Rough Concrete
Direction				
Perpendicular Hold	375Lbs ( 170 kg )	308Lbs ( 140 kg )	220Lbs ( 100 kg )	176Lbs ( 80 kg )
Parallel Hold	265Lbs ( 120 kg )	198Lbs ( 90 kg )	143Lbs ( 65 kg )	176Lbs ( 80 kg )

The brace seal is a replacement seal for GRABO specifically designed for thin materials such as glass thinner than 6mm. We recommend not using Brace Seal on surfaces such as rough slate/concrete due to its thin foam profile.

By Nemo Power Tools -  
[www.GRABO.com](http://www.GRABO.com)

#### GRABO headquarters:

Eastern Commerce Center  
6000 S Eastern Ave  
Unit 9E  
Las Vegas, Nevada, 89119

[Info@GRABO.com](mailto:Info@GRABO.com)

[www.GRABO.com](http://www.GRABO.com)

#### Main Office:

+1 (844) 430-0510

#### Help & Warranty:

+1 (702) 718-2433